

TECHNICAL SHEETS

COD. 3646

GIUNTO DI TRANSIZIONE ACCIAIO-PE
NON FILETTATO ZINCATO

STEEL TO PE TRANSITION FITTING
NOT THREADED - GALVANIZED



COD

D1xD2


L1

L2

L3

L4

3646025003001	25x3 ³ / ₄ "	300	86	30	480
3646032004001	32x1"	300	94	30	490
3646040005001	40x1 ¹ / ₄ "	300	104	30	495
3646050006001	50x1 ¹ / ₂ "	300	114	30	510
3646063007001	63x2"	300	131	30	530
3646075008001	75x2 ¹ / ₂ "	300	134	30	545
3646090009001	90x3"	300	151	30	560
3646110010001	110x4"	300	169	30	580
3646125010001	125x4"	300	200	-	650

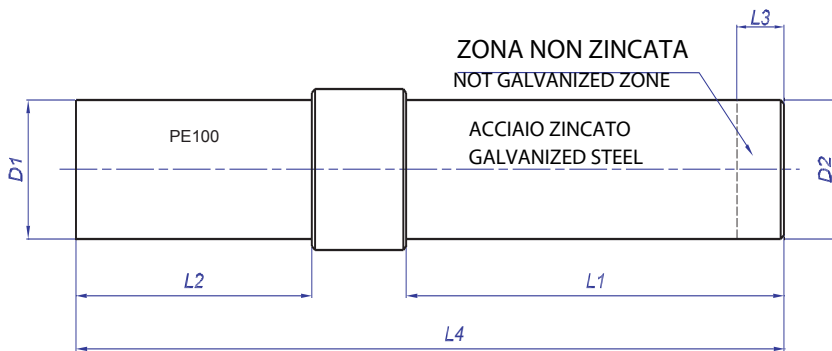

PE100 - SDR11 - S5

ACQUA: PFA (PN)=16 bar 20°C

GAS: MOP=10 bar; In Italia MOP=5 bar
(D.M. 24/11/84 e successive modifiche)

WATER: PFA (PN)=16 bar 20°C

GAS: MOP=10 bar; In Italia MOP=5 bar
(D.M. 24/11/84 and further modification)